



XOP0SW4 | RTNC : : WA: 2 TDD: A



- C cXuV w8Qadt
- C e1 | g8uXDt w8nXh(B4
- C l4t wt 884 | - t Q(B4
- C P w8xt 4 wt 880 t O

w8ht 33 u8F . Qnt | a0nF 88n u8. 3
14(8 - 8f(adt f10 F 88nM

2)1&1" (* +2# 12/"0 1%") /\$"01# 01"01
 #8/" 4, ,! -/, "00,/0 ,+ 1%" * /("1 #,/ 211&+\$
 +! 0-)11&+\$) /\$"/ !& * "1"/), 4 \$/ !"), \$0 &+1,
 #8/" 4, ,! %&0 /2\$\$"! %" 36 !216 * ,!) 4&))
 "### &" +1)6 -/, "00), \$0 2- 1, *
 * 5&* 2 * !& * "1"/ +! * &+
)"+\$1% %" ,!) # " 12/"0 1%" % -
 12/ , % /\$"! ,%+ " /")&.2&! ,,) ! !&"0")
 "+\$&+" #, 2/ % &+ - , 4 "/)&3" !" (/ * 0 +!
 1%" 2)1&1" ("5)20&3" - 1"+1"! , 3"/%" !), \$ &+
 # " ! 0%211)" \$/ --)" 210 +! 0-)10 / , , ("!
), 4 \$/ !"), \$0 &+1, #8/" 4, ,! 1 / 1" 1, 3"/
 1, , /!0 - "/ % , 2/ 20&+\$!2/)" -&1 %
 0 4 % &+ %" 4&)) .2& ()6 0-)1
 1%" * , 01 !&### 2)1 % /!4, ,!), (0 &+1, #8/" 4, ,!
 4&1% - , 4 "/#2) %6! / 2)& 0-)11" / 20&+\$ +
 !'201)" &+1"/ % +\$")" , / 4 6 0-)11" /
) ! "0 , -2) / , -1&, +0 / " 1%" , !")
 , , ! " /&0)" +, 21 , +3"6, / +! , !")
 * , +3"6, / #, /), !&+\$ 1/2 (0
 , / 01, (-&)&+\$



wa(t 4(t n 3l X((t ,. Q- - u
 - 831kt uV ft t n3 a4n
 huaD- 3 (l t u8. 3 F l 1t
 hX((14. M

Xu1t 2 pa4n
 0, FaV 3- u(t O
 F t n. t 3M

3A(t Onl a4. t adu i
 xt Qhaw/ anyX3(adu
 3- u(t OF t n. t 3M
 ot 31 4t n f8Obi 0 a4n
 p, FaV F t n. t 3V3(t D 3M
 r X3(8D 3- u(t O
 8- (B43 axa iadu M

I - (B4au9Akr7D Ch84xt V8Oukt nt h2 t Ht 43B4M

3040XP2 FUELWOOD PROCESSOR

Features and Specifications

*Model 3040XP2
in road legal
transport position
and sets up
in minutes.*



*Optional heated
or heated and
air-conditioned
comfort control
operator's cab
with lighted
gauges.*


SPECIFICATIONS:

- Engine: John Deere Model 4045T Diesel
- Horsepower: 115hp (82 kw) Liquid Cooled, Tier II
- Diesel Fuel Capacity: 50 gal. (189 L)
- Hydraulic Reservoir Cap: 125 gal. (473 L)
- Chain Saw Bar Oil Capacity 2.5 gal. (9.46 L)
- High Strength Alloy Splitter Blades
- Stainless Steel Live Deck Bearings
- EZ Clean Folding Hydraulic Oil Cooler: Standard
- High Torque Hydraulic Motors
- Hydraulic Pilot Operated Joy Sticks
- Axles: Tandem w/elec brakes -ICC Lights
- Trailer Hitch Type: pintle ring
- Transport Length: 29' (8.84 m)
- Transport Width: 8.5' (2.59 m)
- Transport Height: 129" (328 cm)
- Operating Width: 13.5' (4.11 m)
- Livedeck Load Height: 5.5' (1.68 m)
- Livedeck Length: 7.9' (2.41 m)
- Basic Weight: 16,000 lbs. (7,257 kg)
- Hitch Tongue Weight 1,000 lbs (454 kg)

PROCESSOR OPTIONS:

- Caterpillar 125hp Diesel Engine 3054C Liquid Cooled, Tier II
- Extended Engine Warranty available
- Operator Cab Acoustical Sound Dampening Enclosure, lighted, heated
- Operators Cab, Radio, AM/FM CD player
- Operators Cab Air Conditioning Engine Unit or 110 Volt Air
- Electric / Stationary Configuration
- 4 or 6 Way Interchangeable Wedge
- Custom Splitter Options/Sizes
- Infrared Length Measurement
- Engine Anti-Vandalism Kit
- Floodlights Only, less Cab Enclosure
- Short Log Livedeck Arm
- Live Deck Extension 10' (3.05 m)
- COC10 Debris Cleanout Conveyor
- COP6X28 Conveyor Debris Cleanout Pan
- FWC30 Firewood Stacking Conv./30' (9 m)
- FWC35 Firewood Stacking Conv./35' (10.6 m)
- Bolt Retriever Log Bypass Tip Pan

*Hydraulic pilot
operated joy stick
controls, with
ergonomic high
back seat.*




*Hydraulic chip
blower is
standard.*



*Optional wood debris clean out
conveyor 4' (1.2 m) wide
by 9' (2.7 m) long.*

*Powerful
patented
shuttle-
grapple
feeds and
clamps the
logs while
cutting.*

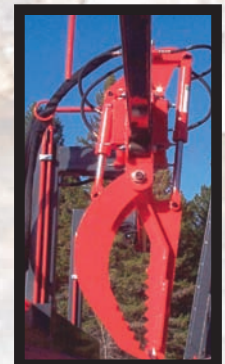

**With a long history of innovative recycling products,
Multitek Firewood Processors increase your bottom line.
A Great Return on Your Investment.**

Manufactured by:


MULTITEK[®]
NORTH AMERICA, LLC

700 Main Street / P.O. Box 170
Prentice WI 54556-0170 U.S.A.
715-428-2000 / Fax 715-428-2700
Toll Free: 800-243-5438

www.multitekinc.com

E-Mail Address: sales@multitekinc.com

Multitek reserves the right to change or improve products without notice and the right to change prices or discounts without notice.
MULTITEK products are covered by several U.S. & Canadian Patents.

Multitek Product Warranty - 12 months.



JOHN DEERE

Your Multitek Dealer:

